

Finally . . . an economical retail scale that weighs everything from small meats to heavy produce!

Great for:
Deli Products
Fruits and Vegetables
Dry Article Goods
Sea Food

PRICE COMPUTING SCALE R-220

15 PLU Preset Keys Large Capacity Dual Display Drainage Platform

Applications

Perfect for any point-of-sales application. R-220's programmable PLU's provide high transaction rates with simple operation. Its large capacity and small division size allows you to handle a wide range of commodities, yet maintain high accuracy.

Features

- 40 lb Capacity
- 15 PLU Preset Keys
- 30 PLU Memories
- Stainless Steel Platform
- Bright Fluorescent Display
- Customer Display (pictured below)
- Automatic Zero Setting Mechanism
- Initial Zero Setting Mechanism
- Unit Price Auto Clear (can disable)
- ◆ Tare Auto Clear (can disable)
- Full Numeric Keypad with 00 Key
- Push Button Keys
 On, Off, Tare, Tare Save, Clear,
 Unit Price Save, & Mode
- Indicators


Tare, Center of Zero, Tare Save, & Unit Price Save




Specifications

ModelR-220Capacities and DivisionsDecimal Pound 40 lb x 0.01 lbor Decimal Kiligrams 20 kg x 0.005 kgAccuracy ClassClass III 2000 DivisionsCertificate of Conformance #98-205A1Weighing SystemStrain Guage Load CellPlatform9.7 x 13.8 (247 x 350); Stainless SteelIndicatorDual Display; Vacuum Fluorescent Tube Weight: 5 Digits Total Price: 5 Digits Total Price: 6 DigitsMaximum Tare40 lb or 9 kgPrice Look Up15 PLU Preset Keys, 30 PLU MemeoriesPower SupplyAC 115 Volts, 5.8 WattsOperating Temp.23°F - 94°F (-5 C - +35 C)Shipping Weight20 lb (9 kg)	Specifications	
Divisions 40 lb x 0.01 lb 70 kg x 0.005 kg Accuracy Class Class III 2000 Divisions Certificate of Conformance # 98-205A1 Weighing System Strain Guage Load Cell Platform 9.7 x 13.8 (247 x 350); Stainless Steel Dual Display; Vacuum Fluorescent Tube Weight: 5 Digits Unit Price: 5 Digits Total Price: 6 Digits Maximum Tare 40 lb or 9 kg Price Look Up 15 PLU Preset Keys, 30 PLU Memeories Power Supply AC 115 Volts, 5.8 Watts Operating Temp. 23°F - 94°F (-5 C - +35 C) Shipping Weight 20 lb (9 kg)	Model	R-220
Certificate of Conformance # Weighing System Strain Guage Load Cell Platform 9.7 x 13.8 (247 x 350); Stainless Steel Dual Display; Vacuum Fluorescent Tube Weight: 5 Digits Unit Price: 5 Digits Total Price: 6 Digits Maximum Tare 40 lb or 9 kg Price Look Up 15 PLU Preset Keys, 30 PLU Memeories Power Supply AC 115 Volts, 5.8 Watts Operating Temp. 23°F - 94°F (-5 C - +35 C) Shipping Weight 20 lb (9 kg)		Or
Conformance # Weighing System Strain Guage Load Cell Platform 9.7 x 13.8 (247 x 350); Stainless Steel Dual Display; Vacuum Fluorescent Tube Weight: 5 Digits Unit Price: 5 Digits Total Price: 6 Digits Maximum Tare 40 lb or 9 kg Price Look Up 15 PLU Preset Keys, 30 PLU Memeories Power Supply AC 115 Volts, 5.8 Watts Operating Temp. 23°F - 94°F (-5 C - +35 C) Shipping Weight 20 lb (9 kg)	Accuracy Class	Class III 2000 Divisions
Platform 9.7 x 13.8 (247 x 350); Stainless Steel Dual Display; Vacuum Fluorescent Tube Weight: 5 Digits Unit Price: 5 Digits Total Price: 6 Digits Maximum Tare 40 lb or 9 kg Price Look Up 15 PLU Preset Keys, 30 PLU Memeories Power Supply AC 115 Volts, 5.8 Watts Operating Temp. 23°F - 94°F (-5 C - +35 C) Shipping Weight 20 lb (9 kg)		98-205A1
Indicator Dual Display; Vacuum Fluorescent Tube Weight: 5 Digits Unit Price: 5 Digits Total Price: 6 Digits Maximum Tare 40 lb or 9 kg Price Look Up 15 PLU Preset Keys, 30 PLU Memeories Power Supply AC 115 Volts, 5.8 Watts Operating Temp. 23°F - 94°F (-5 C - +35 C) Shipping Weight 20 lb (9 kg)	Weighing System	Strain Guage Load Cell
IndicatorWeight: 5 Digits Unit Price: 5 Digits Total Price: 6 DigitsMaximum Tare40 lb or 9 kgPrice Look Up15 PLU Preset Keys, 30 PLU MemeoriesPower SupplyAC 115 Volts, 5.8 WattsOperating Temp.23°F - 94°F (-5 C - +35 C)Shipping Weight20 lb (9 kg)	Platform	9.7 x 13.8 (247 x 350); Stainless Steel
Price Look Up 15 PLU Preset Keys, 30 PLU Memeories Power Supply AC 115 Volts, 5.8 Watts Operating Temp. 23°F - 94°F (-5 C - +35 C) Shipping Weight 20 lb (9 kg)	Indicator	Weight: 5 Digits Unit Price: 5 Digits
Power Supply AC 115 Volts, 5.8 Watts Operating Temp. 23°F - 94°F (-5 C - +35 C) Shipping Weight 20 lb (9 kg)	Maximum Tare	40 lb or 9 kg
Operating Temp. 23°F - 94°F (-5 C - +35 C) Shipping Weight 20 lb (9 kg)	Price Look Up	15 PLU Preset Keys, 30 PLU Memeories
Shipping Weight 20 lb (9 kg)	Power Supply	AC 115 Volts, 5.8 Watts
	Operating Temp.	23°F - 94°F (-5 C - +35 C)
All weights and dimensions are approximate. Dimensions are given in inches and (millimeters)		(3,

All weights and dimensions are approximate. Dimensions are given in inches and (millimeters).

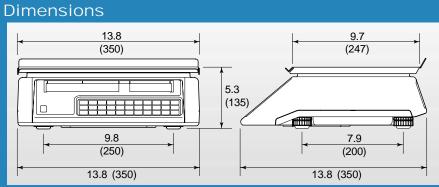





Yamato Corporation

P.O. Box 15070 Colorado Springs, CO 80935-5070 U.S.A.

Tel (719) 591-1500 Fax (719) 591-1045 Yamato Tech Corporation

#112-19425 Langley By-Pass Surrey, B.C. V3S 6K1 Canada Tel (604) 533-2338 Fax (604) 533-0827