



CLASSIC-LINE® PROOFER HOT

Job _____ Item # _____

HEATED HOLDING CABINETS

Model CPH71-MP17



Model CPH71-MP17
with standard, reversible doors

STANDARD FEATURES

- 14-Gauge aluminum construction
- Removable heating & humidity control module
- Rear air tunnel system for even air circulation
- Accurate & reliable solid-state controls with digital display & 12-hour timer
- 80°-185°F (27°-85°C) temperature range
- May be used with or without water
- Field-reversible polycarbonate door with 270° door swing
- Positive latching door handle
- Santoprene door gasket
- 5" Swivel-type plate casters — 2 with locks
- Adjustable universal slides
- 115v, 20a, 1ph, 60hz
- 1-Year limited parts & labor warranty

SPECIFICATIONS

Classic-Line® Proofer Hot cabinets are designed for multi-purpose applications including holding, proofing and mobile, heated transport, and are constructed of die-formed, corrosion-resistant 14-gauge aluminum body and heavy-duty galvanized aluminum base.

The bottom-mounted, heating and humidity module is removable and may be used with or without water and provides uniform heat distribution through a removable, louvered, rear-mounted air tunnel and a one-piece, modular, drop-in designed blower fan assembly with an adjustable damper.

Features include external controls with digital display, a 12-hour timer, dual-purpose thermostat for holding or proofing with a removable condensation drip-trough for easy cleaning.

Temperature ranges from 80°-185°F (27°-85°C) while the humidity system features a 5-quart, stainless steel water reservoir.

Standard features include transparent polycarbonate door with 270° door swing, positive latching handle and Santoprene® door gasket, 5" swivel plate casters (two with locks), 9-foot cord with plug with cord clip on side of cabinet.

Classic-Line proofer hot cabinets feature adjustable universal wire slides with 3" (75mm) spacing to 6 3/4" (172mm) spacing and accommodates 18"x26" and/or 18"x13" and/or 12"x20" pans and/or 20"x20" pizza boxes.


1-Year limited parts and labor warranty.

OPTIONS & ACCESSORIES


- 1 1/2" space ledge kit

CERTIFICATIONS




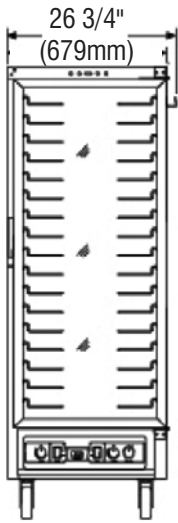

FRONT VIEW

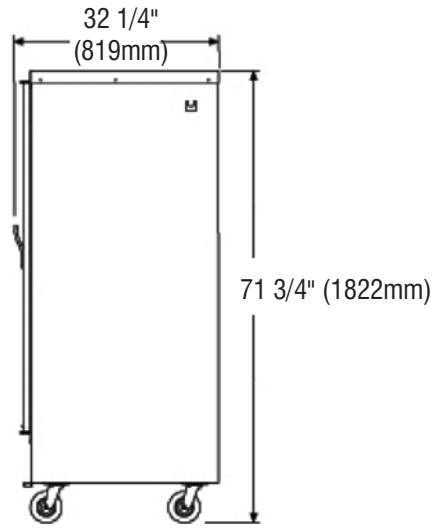

SIDE VIEW

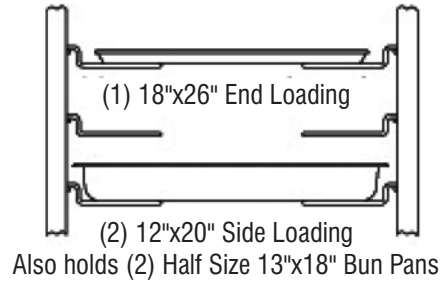

LOADING CAPACITY

ALL DIMENSIONS NOMINAL

Continuous product improvement is a policy of BKI/BEVLES. Therefore, specifications and design are subject to change without notice.

SHIPPING INFORMATION										
Model	Carton Size		Carton Dimensions				Shipping Weight			
	Cubic Feet	Cubic Meters	Width		Depth	Height		Lbs	Kilos	
	Inches	mm	Inches	mm	Inches	mm	Inches	mm		
CPH71-MP17	44	1.26	29	737	35	889	75	1905	195	82

CAPACITY				
Model	Slide Spacing	# of Positions	Type	# of Shelves Provided
CPH71-MP17	3"	17	Adjustable	17

POWER SUPPLY					
Models	Volts	Watts	Amps	Electrical Service	Phase
CPH71-MP17	115	2000	17	20A	60

MINIMUM CLEARANCES		
	Inches	mm
Right	0	0
Left	0	0
Rear	0	0

