


# CV Series Continuous Vacuum Packaging Machine Technical Specifications

Stainless steel construction for maximum durability and convenient cleaning. Equipped with a conveyor belt, the CV-1000 will operate in a semi-automatic or continuous operation, which increases output and reduces labor costs. Production line operation can be achieved by adding an in feed and exit conveyor system.

If you need to package items containing liquids, the conveyor table can be adjusted to various angles, preventing product overflow. The conveyor belt can be easily washed down and the stainless steel chains meet food sanitation requirements.

Other standard features include a high efficiency Busch vacuum pump and a microprocessor controller with 12 program capability.

MODELS	CV-1000	CV-1200
Seal Bar Length	41.4"/1050mm	41.4"/1050mm
Distance Between Seal Bars	18"/460mm	22"/550mm
Chamber Depth	7"/180mm	8"/200mm
Vacuum Pump Capacity	100m <sup>3</sup> /h (5hp/3kw)	302m <sup>3</sup> /h (12hp/10kw)
Cycle	3~5 cycles/min	3~5 cycles/min
Voltage	220V/3ph/60Hz/20amp	220V/3ph/60Hz/48amp
Machine Weight	990 lbs / 450kg	1295 lbs / 588kg

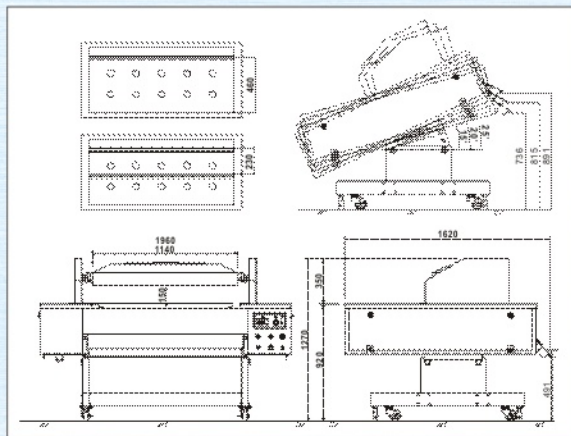

## Options:

- Dual Seal bars
- Gas flushing
- Voltage
- Sensor control
- Custom sizes available
- Vacuum pump



**All specifications are subject to change without notice.**