

DC Series Vacuum Chamber Packaging Machines

Technical Specifications

MODELS	DC-530	DC-640	DC-650	DC-800	DC-860	DC-900
Chamber Size (F) (H)	30"/760mm 23.6"/600mm	32"/808mm 29"/730mm	32.2"/818mm 35"/889mm	38.5"/980mm 31.1"/790mm	40.9"/1040mm 40.7"/1035mm	48"/1220mm 41"/1040mm
Chamber Depth (E)	7"/178mm	8"/200mm	8"/200mm	8"/200mm	10"/255mm	12"/305mm
Distance Between Seal Bars (B)	17"/430mm	22"/560mm	28"/715mm	24"/610mm	33"/838mm	35"/880mm
Seal Bar Length (A)	21.2"x4/540mm	25.2"x4/640mm	25.2"x4/646mm	31.5"x4/800mm	34.6"x4/880mm	39.3"x4/1000mm
Vacuum Pump Capacity	40m3/h (2hp/2kw)	63m3/h (3hp/2.4kw)	100m3/h (5hp/4kw)	100m3/h (5hp/4kw)	302m3/h (12hp/10kw)	302m3/h (12hp/10kw)
Voltage	230V/3ph/60Hz/9amp	230V/3ph/60Hz/11amp	230V/3ph/60Hz/18amp	230V/3ph/60Hz/18amp	230V/3ph/60Hz/42amp	230V/3ph/60Hz/42amp
Machine Size CxGxD	58"x34"x44" 1473x863x1117mm	62"x36"x44" 1575x915x1117mm	62"x40.3"x43.4" 1580x1025x1103mm	75"x42"x45" 1905x1066x1143mm	83"x51"x48" 2108x1295x1219mm	98"x52"x50" 2489x1320x1270mm
Machine Weight	657 lbs.(298kg)	908 lbs.(412kg)	1216 lbs.(552kg)	1195 lbs.(572kg)	2100 lbs.(955kg)	2332 lbs.(1060kg)


DC Series vacuum chamber packaging machines have been designed for economical, single operator efficiency.

Standard Features:

- Stainless steel construction
- Flat chamber for easy cleaning
- **PD01** (Model DC530)
- **PNC01** (except DC530)
- Computerized water resistant control panel (IP 56) (12 programs with oil indicator)
- 10mm wide seals
- Bladder activated sealing
- High density plastic filler plates
- Pump overload warning indicator
- Oil change indicator
- Vacuum sensor controls (DC-860/900)
- Heavy duty casters
- Air assist
- Automatic lid transfer (DC-900)

Optional Features:

- **PNC01** (for Model DC530)
- Single phase motor available up to 100m3/h (5hp) pump
- Top & bottom seal
- Gas flush
- Chamber height
- Mechanical knife cut-off system
- Automatic lid transfer (DC-530/640/650/800/860)
- Voltage
- Pump horsepower upgrade
- Custom chamber sizes are available
- DC series lid height (10" or 12"option)

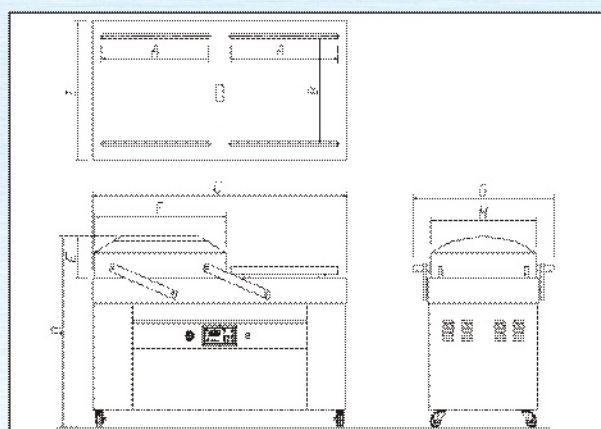

All specifications are subject to change without notice.