

ANGLE RUNNER Racks


Models: ☐ RA64-AR18 ☐ RA64-AR21 ☐ RA70-AR20 ☐ RA70-AR24 ☐ RA70-AR40 (dbl) ☐ RA70-AR48 (dbl)

Design Features

- Angle Runner Racks are built for extra strength and durability
- From trays and platters to tote boxes and baking sheets, Angle Runner Racks serve any storage and handling need
- These versatile racks can be postitioned at any busy kitchen or bakery location to make loading or unloading quick and easy
- Racks add convenience and efficiency to any operation
- Choose from single or double width models

Quality Construction

- Extruded aluminum contruction
- Top and bottom frames are heavy-gauge 1½" square tubing welded to vertical angle members at each corner
- .190 aluminum caster mounting plate is welded to each corner of the bottom frame
- Racks are mounted on 5" plate-type casters which assure smooth and easy movement - even when fully loaded
- Heavy-duty extruded angle pan supports with double-bead for easy sliding of pans, are riveted to uprights

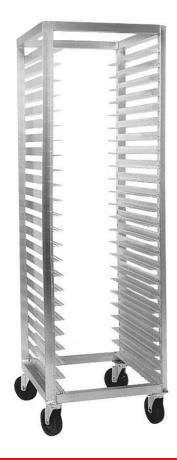

Options & Accessories

- Corner Bumpers
- Perimeter Bumper
- Vertical Pan Stop
- Wheel Brakes

Warranty & Cerifications

Parts and Service Warranty

Protected by BevLes 2 year parts and 1 year service warranty

Certified by the following:












ANGLE RUNNER Racks

Models: ☐ RA64-AR18 ☐ RA64-AR21 ☐ RA70-AR20 ☐ RA70-AR24 ☐ RA70-AR40 (dbl) ☐ RA70-AR48 (dbl)

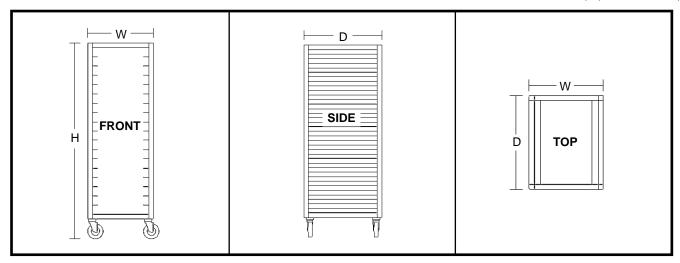

Model	Capacity			Dimensions			Ship Wt.	Act. Wt.
	18x26	12x20	SPC'G	Н	W	D	Omp W.	ACL WL
RA64-AR18	18		3"	64" (162.6 cm)	21.5" (54.6 cm)	26" (66 cm)	57 lbs (25.9 kg)	42 lbs (19.1 kg)
RA64-AR21	21		2½"	64" (162.6 cm)	21.5" (54.6 cm)	26" (66 cm)	59 lbs (26.8 kg)	44 lbs (20.0 kg)
RA70-AR20	20		3"	70" (177.8 cm)	21.5" (54.6 cm)	26" (66 cm)	61 lbs (27.7 kg)	46 lbs (20.9 kg)
RA70-AR24	24		2½"	70" (177.8 cm)	21.5" (54.6 cm)	26" (66 cm)	63 lbs (28.6 kg)	48 lbs (21.8 kg)
RA70-AR40 (dbl)	40		3"	70" (177.8 cm)	42" (106.7 cm)	26" (66 cm)	100 lbs (45.4 kg)	85 lbs (38.6 kg)
RA70-AR48 (dbl)	48		2½"	70" (177.8 cm)	42" (106.7 cm)	26" (66 cm)	105 lbs (47.6 kg)	90 lbs (40.8 kg)

Construction

- Bottom and top frame consist of durable 1½" square tube heliarc welded at all corners
- Uprights are 1½" x 1½" extruded angle heliarc welded to bottom and top frames
- Bottom frame has .190 aluminum caster mounting plates heliarc welded to corners

Pan Supports

 1½" x 1¾" extruded aluminum angles that are riveted to rack uprights

Casters

 Heavy-duty plate-type casters, all swivel, with 5" neoprene wheels

Shipping

• Freight Class: 125

• FOB: Cheyenne, WY 82007

* Note: Modifications involving casters or legs may affect height of equipment. Specifications subject to change without notice.

