



# MULTI-SPACE Racks

Models:  RA70-ES38  RA70-ES57  RA70-ES76  RA70-ES114

## Design Features

- Multi-space racks are designed for maximum vertical usage of floor space
- Lip load feature is ideal for handling “high profile” products on 18” x 26” pans
- Selective spacing on various models with 1” or 1½” centers
- Sanitary inverted “V” seam side panels allow for easy cleaning
- Choose from single or double width models

## Quality Construction

- All aluminum construction
- Top and bottom frames consist of 1½” square tube heliarc welded at all corners
- Extruded 1½” x 1½” angle uprights are welded to top and bottom frames
- Interlocking extruded side panels form durable easy to clean sides that support 18” x 26” pans on 1” or 1½” centers
- Extruded tie bars bolted horizontally front and rear
- .190 aluminum caster mounting plate is welded to each corner of bottom frame
- 5” heavy-duty plate-type casters with neoprene wheels



## Options & Accessories

- Corner bumpers
- Perimeter bumper
- Vertical pan stop
- Wheel brakes

## Warranty & Certifications

### Parts and Service Warranty

- Protected by BevLes 2 year parts and 1 year service warranty

**Certified by the following:**




Mailing: 729 Third Ave., Dallas, TX 75226 • Shipping: 1938 Wyott Dr., Cheyenne, WY 82007  
(800) 441-1601 • Fax: (214) 565-0976 • [www.bevles.com](http://www.bevles.com) • [sales@bevles.com](mailto:sales@bevles.com)



# MULTI-SPACE Racks

Models:  RA70-ES38  RA70-ES57  RA70-ES76  RA70-ES114

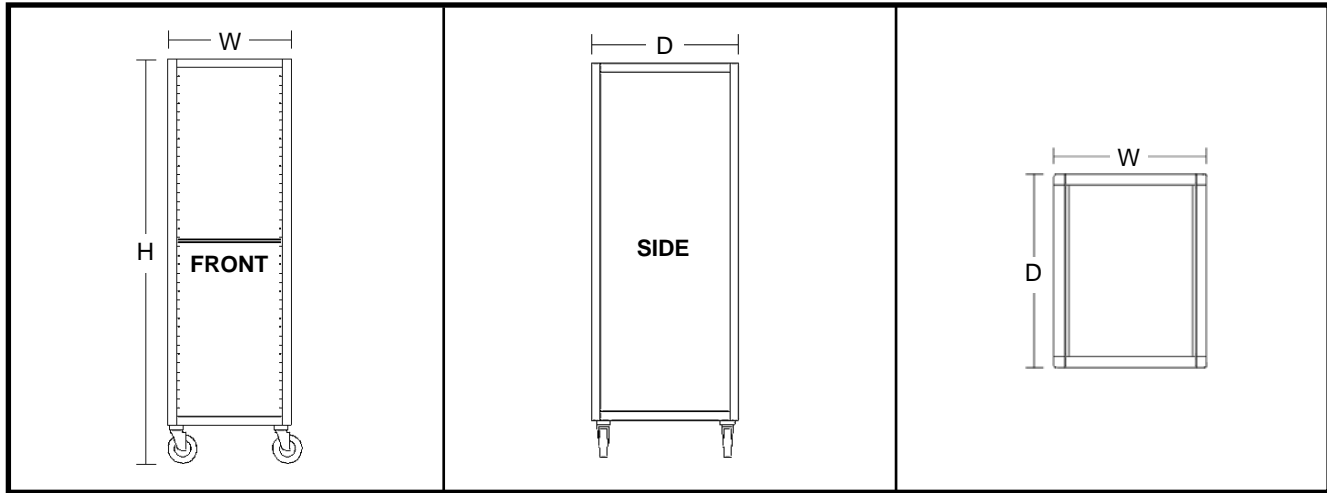

Model	Capacity			Dimensions			Ship Wt.	Act. Wt.
	18x26	12x20	SPC'G	H	W	D		
<b>End Load</b>								
RA70-ES38	38	---	1½"	70.5" (179 cm)	21.5" (54.6 cm)	26" (66 cm)	70 lbs (31.8 kg)	55 lbs (24.9 kg)
RA70-ES57	57	---	1"	70.5" (179 cm)	21.5" (54.6 cm)	26" (66 cm)	75 lbs (34 kg)	50 lbs (22.7 kg)
RA70-ES76	76	---	1½"	70.5" (179 cm)	42" (106.7 cm)	26" (66 cm)	120 lbs (54.4 kg)	105 lbs (47.6 kg)
RA70-ES114	114	---	1"	70.5" (179 cm)	42" (106.7 cm)	26" (66 cm)	136 lbs (61.7 kg)	121 lbs (54.9 kg)

## Construction

- Bottom and top frames consist of durable 1½" square tube heliarc welded at all corners
- Uprights are 1½" x 1½" extruded angle welded to corners of top and bottom frames
- Tie bar is custom extruded shape mounted horizontally at front and rear of rack
- Sides consist of interlocking extruded panels riveted to uprights
- Bottom frame has .190 aluminum caster mounting plates welded to corners

## Pan Supports

- Extruded panels with 9/16" wide ledges on 1' or 1½" centers to lip support 18" x 26" pans

## Casters

- Heavy-duty plate-type casters, all swivel, with 5" neoprene wheels

## Shipping

- Freight Class: 125
- FOB: Cheyenne, WY 82007

\* Note: Modifications involving casters or legs may affect height of equipment. Specifications subject to change without notice.



Mailing: 729 Third Ave., Dallas, TX 75226 • Shipping: 1938 Wyatt Dr., Cheyenne, WY 82007  
(800) 441-1601 • Fax: (214) 565-0976 • www.bevles.com • sales@bevles.com

6/21/05  
#B503