




Design Features

- Durable, light weight extruded materials provide years of dependable service
- 64" maximum height is ideal for "roll-in" applications
- All 12 sets of heavy-duty "adjustable" pan supports (RA64-UA12-R model) are removable for thorough cleaning
- All racks will accommodate 18" x 26" pans, and RA64-UA12-R will also accept 12" x 20" pans
- No center bracing to interfere with loading or unloading
- Casters inset to permit a full 360° swing without breaking the rack's exterior plane

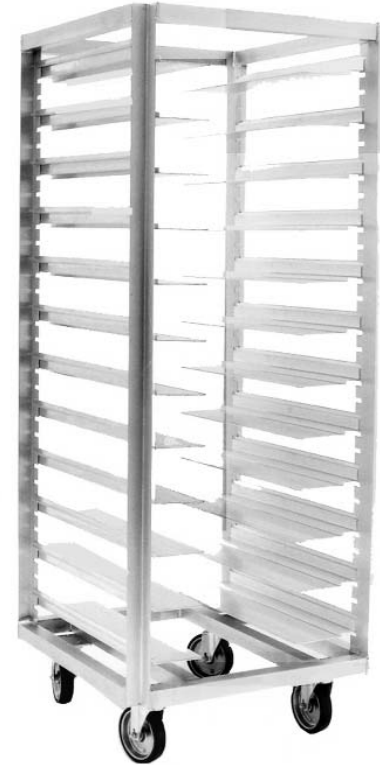

Quality Construction

- Extruded aluminum construction
- Top frame consists of four pieces of 1½" square tube heliarc welded at all corners
- Bottom frame consists of six pieces of 1½" square tube welded at all corners and at front and rear sections to support "inset" caster placement
- Heavy-duty plate-type casters with 5" polyurethane wheels bolted to mating plates heliarc welded to bottom frame

Options & Accessories

- Corner bumpers
- Perimeter bumper
- Vertical pan stop
- Wheel brakes

Warranty & Certifications

Parts and Service Warranty


- Protected by BevLes 2 year parts and 1 year service warranty

Certified by the following:





Models: RA64-AR18-R RA64-AR21-R RA64-UA12-R

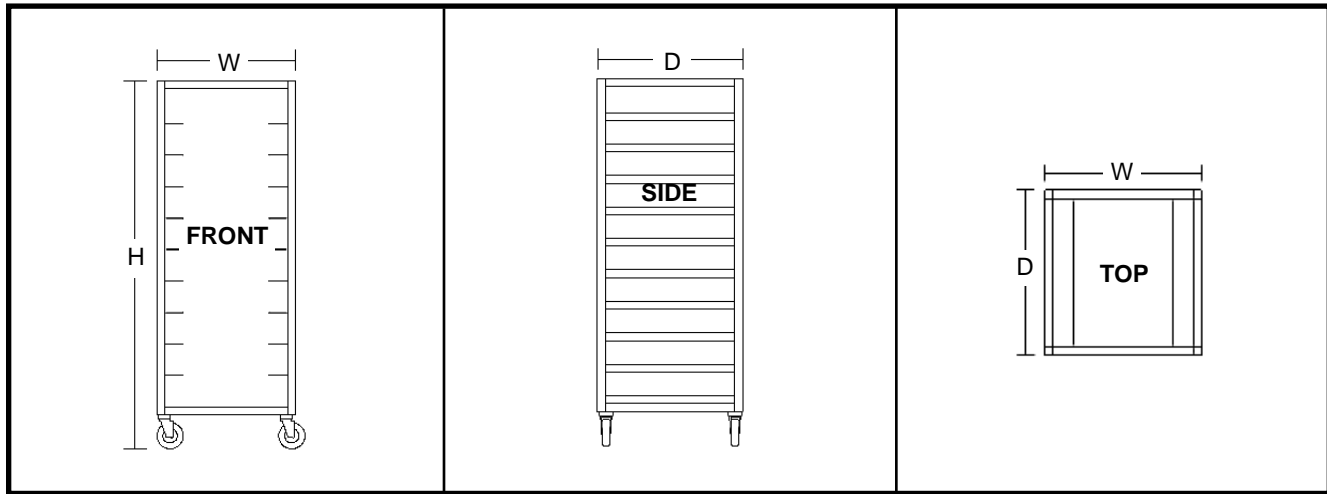

Model	Capacity			Dimensions			Ship Wt.	Act. Wt.
	18x26	12x20	SPC*G*	H	W	D		
RA64-AR18-R	18	---	3"	64" (162.6 cm)	21.5" (54.6 cm)	26" (66 cm)	62 lbs (28.1 kg)	47 lbs (21.3 kg)
RA64-AR21-R	21	---	2½"	64" (162.6 cm)	21.5" (54.6 cm)	26" (66 cm)	66 lbs (29.9 kg)	51 lbs (23.1 kg)
RA64-UA12-R	12	24	4½"	64" (162.6 cm)	24.5" (54.6 cm)	26" (66 cm)	80 lbs (36.3 kg)	65 lbs (29.5 kg)

*RA64-UA12-R pan supports are adjustable on 1½" centers

Construction

- Bottom and top frames consist of 1½" square tube heliarc welded at all seams
- Uprights on the *RA64-AR18-R* and *RA64-AR21-R* are 1½" x 1½" extruded angle heliarc welded to bottom and top frames
- Uprights on the *RA64-UA12-R* are custom "T" shaped extrusion with 1½" spacing to allow adjustment of pan supports. "T" uprights are heliarc welded to bottom and top frame
- Bottom frame has .190 aluminum caster mounting plates welded to the 1½" square tube

Pan Supports

- *RA64-AR18-R* and *RA64-AR21-R* have 1½" x 1¾" extruded aluminum angles riveted to rack uprights
- *RA64-UA12-R* has 12 sets of extruded heavy-duty "adjustable" universal pan supports

Casters

- Heavy-duty plate type casters, all swivel, with 5" polyurethane wheels
- Casters are "inset" for roll-in applications

Shipping

- Freight Class: 125
- FOB: Cheyenne, WY 82007

* Note: Modifications involving casters or legs may affect height of equipment. Specifications subject to change without notice.

