

# COUNTER TOP ELECTRIC WARMING SHELVES

Job	Item #
ELECTRIC	WARMING SHELVES
	☐ Model WS-24 ☐ Model WS-36 ☐ Model WS-48 ☐ Model WS-60 ☐ Model WS-72



Model WS-24

#### **SPECIFICATIONS**

Warming Shelves are designed and manufactured to hold food at required NSF temperatures, and are ideal for holding pizza in takeout operations, server-to-customer pass through areas, cafeterias, pizza buffets and any foods at safe temperatures.

Unique element design provides uniform heat while infinite controls, with knobs on operator side, deliver rapid pre-heat up to  $212^{\circ}F$  (112°C).

BKI Warming Shelves feature all stainless steel surfaces for ease of cleaning, durability and to resist the stresses of repeated use and abuse.

Available in 5 lengths from 24" (610mm) to 72" (1829mm) in one-foot increments, and are 18" deep (457mm) for large pizzas, and are only 3" tall (76mm) including 1/2"natural rubber feet (13mm).

120 Volt with 6' (1830mm) cord & plug standard.

1-Year limited parts and labor warranty included.

CTA	NDA	ו חאי	FFAT	IIRES

- □ WS-24 @ 200 Watts
- □ WS-36 @ 300 Watts
- WS-48 @ 400 Watts
- WS-60 @ 600 Watts
- ☐ WS-72 @ 700 Watts
- ☐ All models 18" wide (457mm)
- ☐ Infinite control with temperatures up to 212°F (112°C)
- ☐ All stainless steel surfaces
- □ 1/2" Natural rubber feet
- ☐ 6' Cord & plug (1830mm)
- ☐ Limited 1-year parts & labor warranty

#### **OPTIONS & ACCESSORIES**

- □ 208 Volt
- 220 Volt with CE approval
- □ 240 Volt

### **CERTIFICATIONS**
















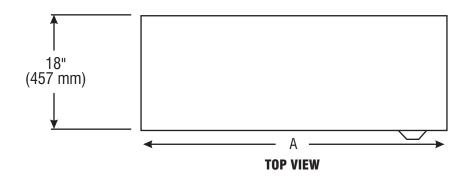





## ALL DIMENSIONS NOMINAL

SHIPPIN	SHIPPING INFORMATION										
	Shipping Weight Carton Dimensions						Crate Size				
Model	Lbs.	Kilos	Wi Inches	dth mm	De <sub>l</sub> Inches	pth mm	Hei Inches	ght mm	Cubic Feet	Cubic Meter	
WS-24	27	12.3	29	737	23	584	7	178	2.7	.07	
WS-36	38	17.3	40	1016	23	584	7	178	3.7	.10	
WS-48	49	22.3	53	1346	23	584	7	178	4.9	.13	
WS-60	58	26.4	64	1625	23	584	7	178	6.0	.16	
WS-72	70	31.8	77	1956	23	584	7	178	7.2	.19	

Under 500 lbs = Shipping Class # 70

	Overall Dimensions*						
Model	Wi Inches	dth mm	Dep Inches	oth mm	Heiq Inches	ght mm	
WS-24	24	610	18	457	3	76	
WS-36	36	914	18	457	3	76	
WS-48	48	1319	18	457	3	76	
WS-60	60	1524	18	457	3	76	
W/S-72	72	1829	18	457	3	76	

<sup>\*</sup> Height includes 1/2"(13mm) standard rubber feet

POWER	POWER SUPPLY								
Model	WATTS	VOLTAGE	PHASE	AMPS	NEMA Plug #				
WS-24	200	120	1	1.7	5-15P				
WS-36	300	120	1	2.5	5-15P				
WS-48	400	120	1	3.3	5-15P				
WS-60	500	120	1	4.2	5-15P				
WS-72	600	120	1	5.0	5-15P				



5-15P

